

**INVESTIGATION OF ANOMALOUS DENSITIES OF
HIGH-ENERGY ALPHA-PARTICLES TRACKS IN CR-39
DETECTORS DURING ELECTROLYSIS OF HEAVY WATER ON
PALLADIUM CATHODES**

U. Mastromatteo, R. Aina

STMicroelectronics SPA, Cornaredo, Milano (Italy)

Recently, several researchers claim the finding of anomalous alpha-particles generation during very simple electrolysis experiments with heavy water and palladium cathodes. The phenomenon seems to improve if deuterium formation on the cathode is associated with deposition of palladium nanostructures coming from chlorides of the same metal present in the electrolytic solution. Due to the relevance of the claims and considered the simplicity of the experimental apparatus, several tests have been performed in order to confirm the claimed results. The results of these tests will be the object of this scientific report.

Investigation of anomalous densities of high-energy alpha-particles tracks in CR-39 detectors during electrolysis of heavy water on palladium cathodes.

R. Aina, **U.Mastromatteo**

STMicroelectronics – Via Tolomeo, 1 -20010 Cornaredo (MI)

Oriani's claims



Abstract

A relatively simple technique using CR39 particle detectors has been developed that in 25 consecutive electrolyses has reproducibly produced charged particle tracks, showing unambiguous evidence of a nuclear reaction during electrolysis of heavy or light water solutions. Nuclear tracks can be produced upon the surface and beyond the 1 mm thickness of the CR39 detectors. Nuclear activity of some sort can persist in the Viton o-rings used in the electrolysis cell so that charged energetic particles can be generated subsequently without electrolysis.

Repeatable technique for the generation of a nuclear reaction during electrolysis

R.A Oriani

University of Minnesota, 151 Amundson Hall, 421 Washington Ave SE, Minneapolis MN 55455 email: orian001@umn.edu

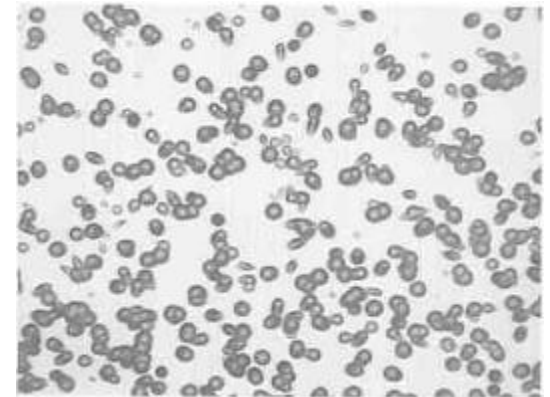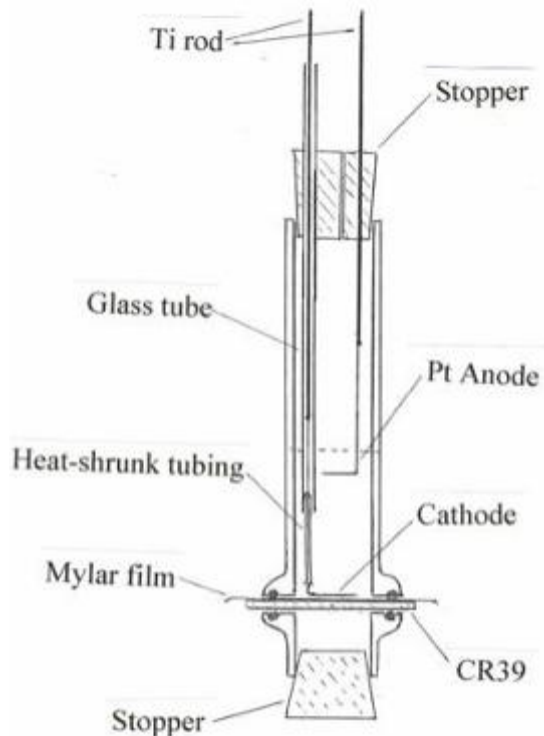


Oriani's results

❏ Examination showed that haze patterns following the circumference of the o-rings had developed, similar to that illustrated by Fig.5. However, the central regions of the areas bounded by the haze rings were clear. The track densities were 55 tracks/cm² on one chip and 70 on the other. These numbers are to be compared with the background value of 55 per cm² and with over 2000 tracks /cm² found in the center of the chip pictured in Fig.5.

AIM OF EXPERIMENT


- To detect alpha particles emission from Pd cathode during electrolysis D loading using a standard plastic detector for measurements of radon in the environment
- Expected tracks density from Pd cathode should be significantly higher than noise level

CR 39 TRACK DETECTOR

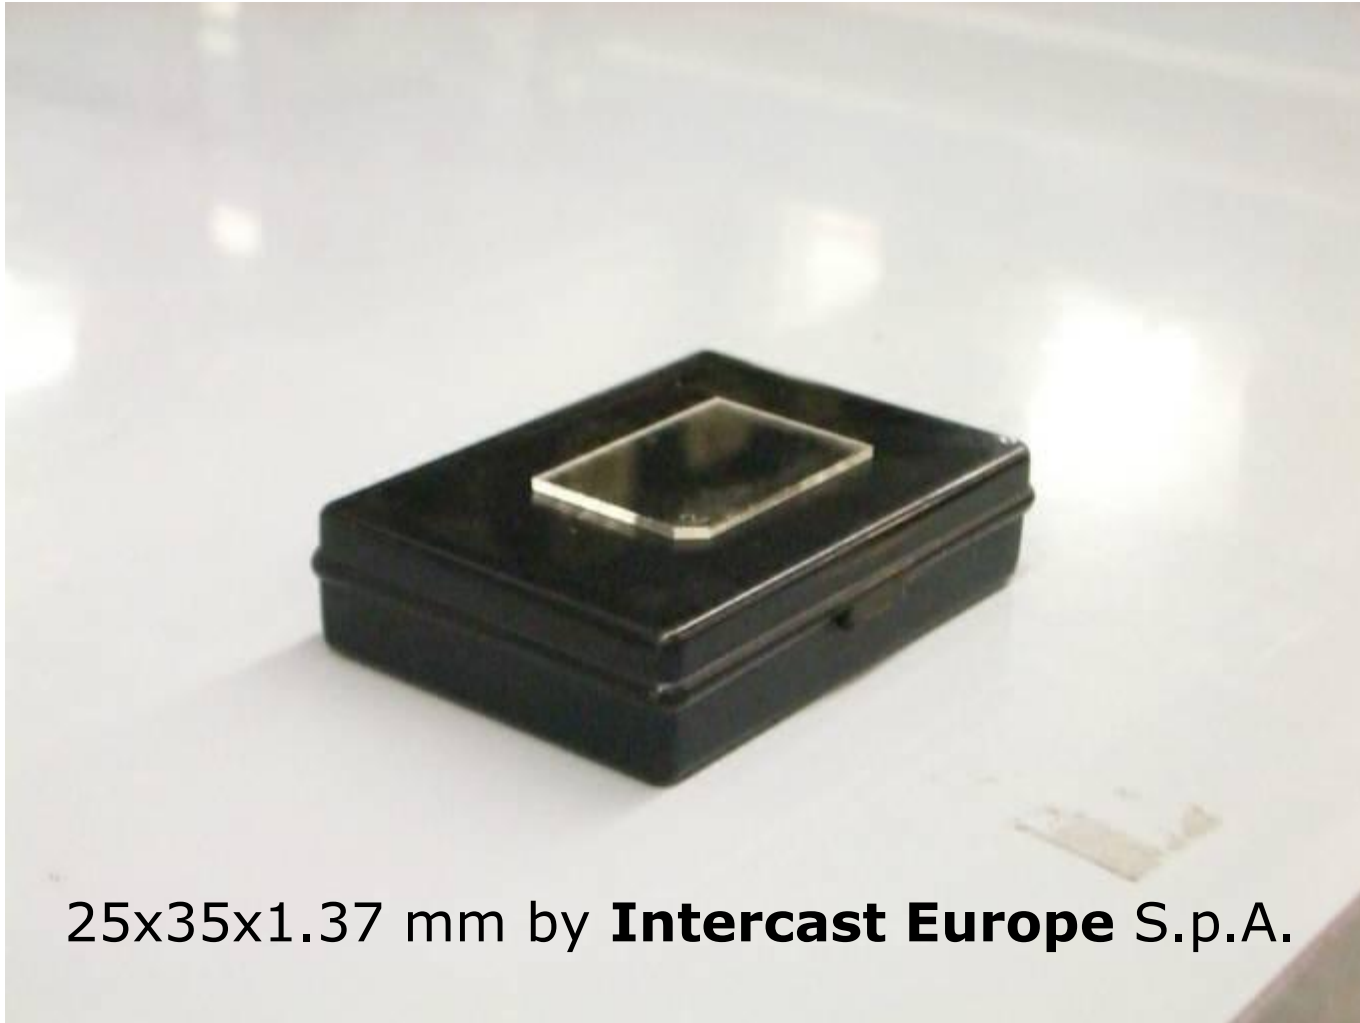

25x35x1.37 mm by **Intercast Europe S.p.A.**


ELECTROLYSIS CELL

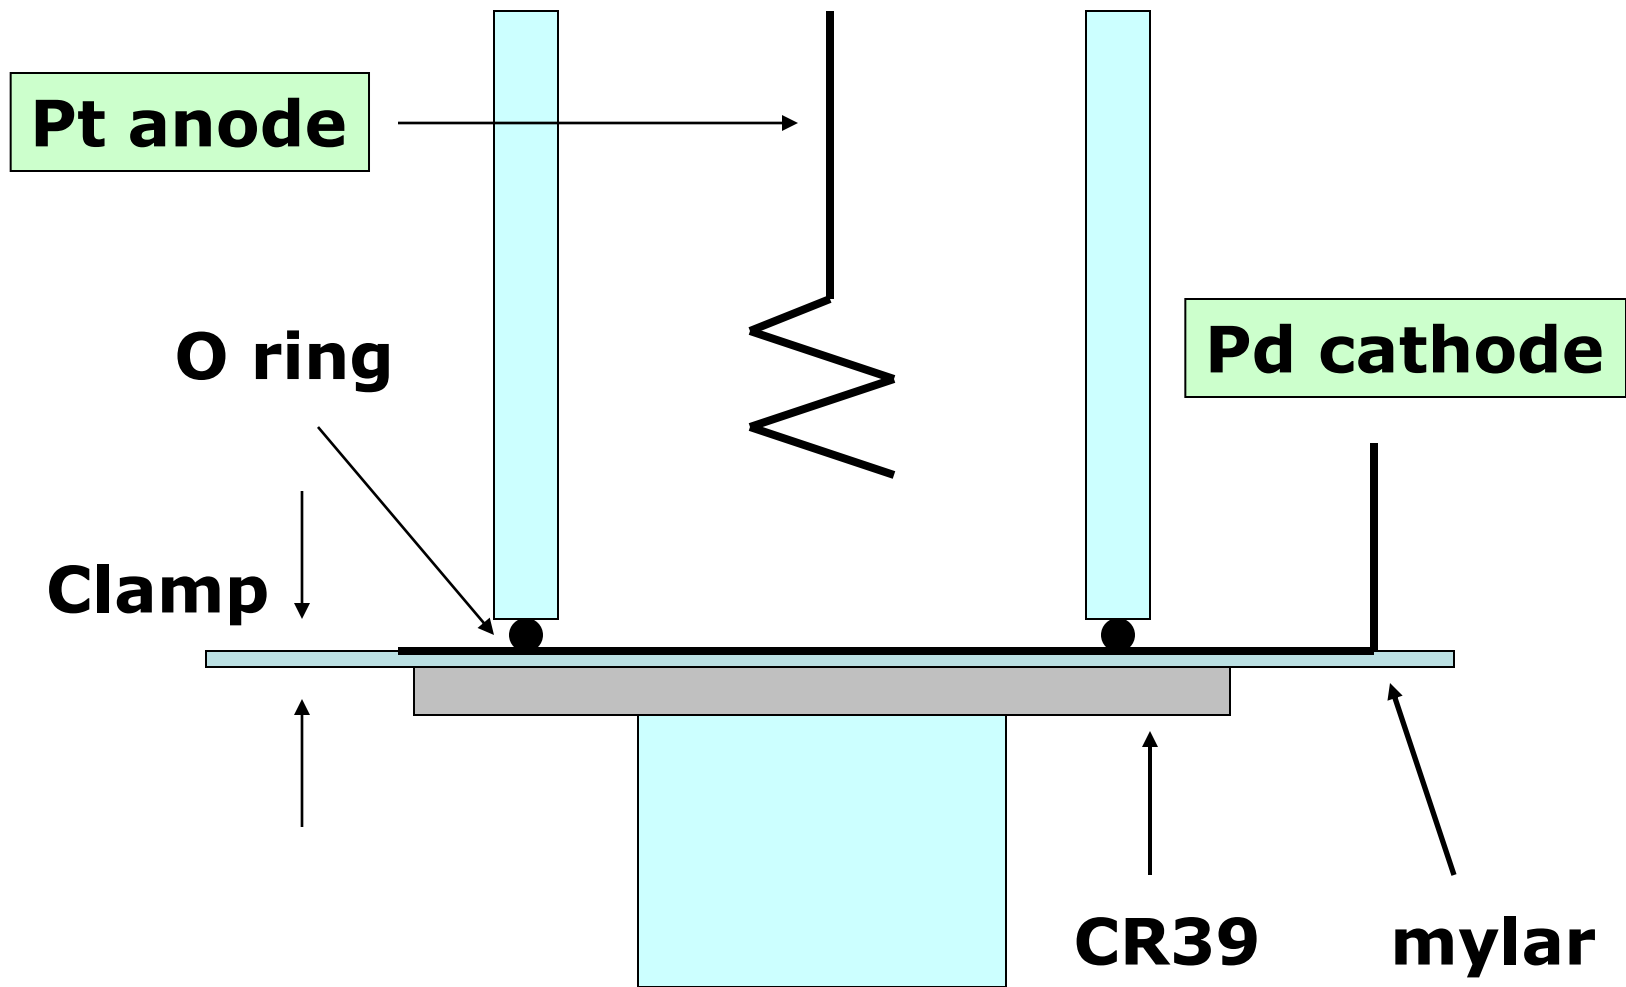

HIGHLIGHT OF MYLAR - CR39 ASSEMBLY



CR 39

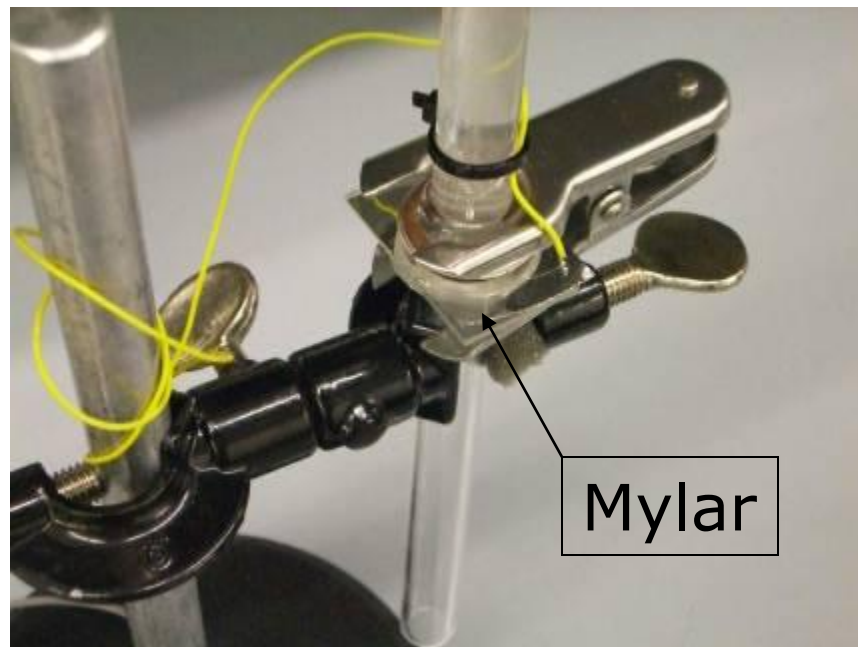

Mylar

WHY MYLAR?


- Mylar interposed between Pd cathode and CR 39 prevents this one to be etched or contaminated by electrolytic solution during D loading
- Artifacts on CR 39 plate can produce wrong interpretation of results. We think this happened in some experiments from others experimentalist

ELECTROLYSIS PARAMETERS

- ▣ LiCl 0.5 M in 10 mL D₂O
- ▣ I_c :10 mA; (~ 0.5 A/cm²)
- ▣ Cathode :Pd wire, Ø 50 µm, 12 mm length
- ▣ Anode :Pt spiral wire
- ▣ Mylar 11 µm thick
- ▣ Time: 3 – 7 days

ETCH CONDITIONS


- ▣ NaOH 6.25 M @
70°C for 6 hours
- ▣ Heating plate with
electronic
temperature control
- ▣ Thermometer for
T° stability check

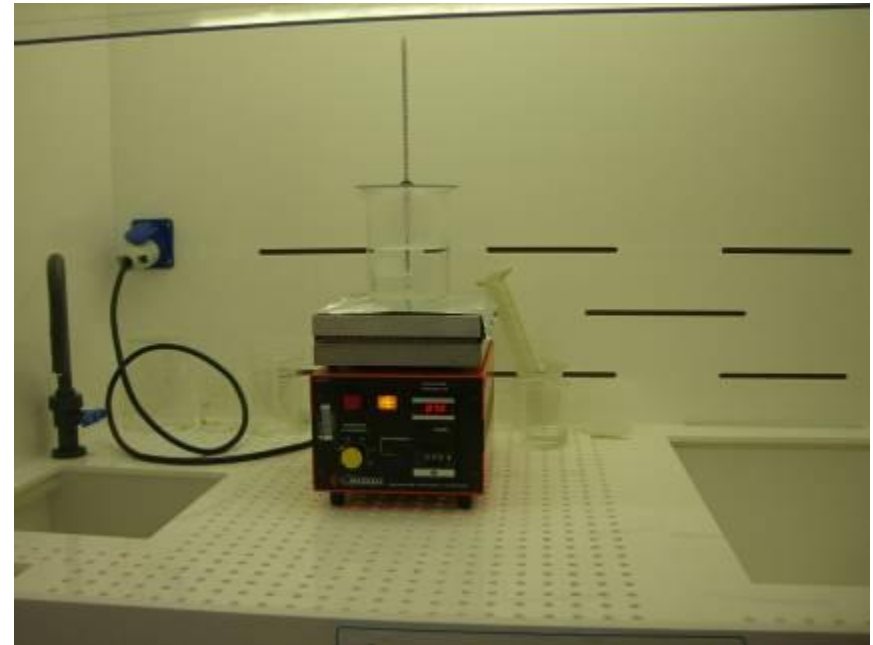

FIELD SCAN GRID

Total field area: 1.186 cm²

125 boxes
Inside circle

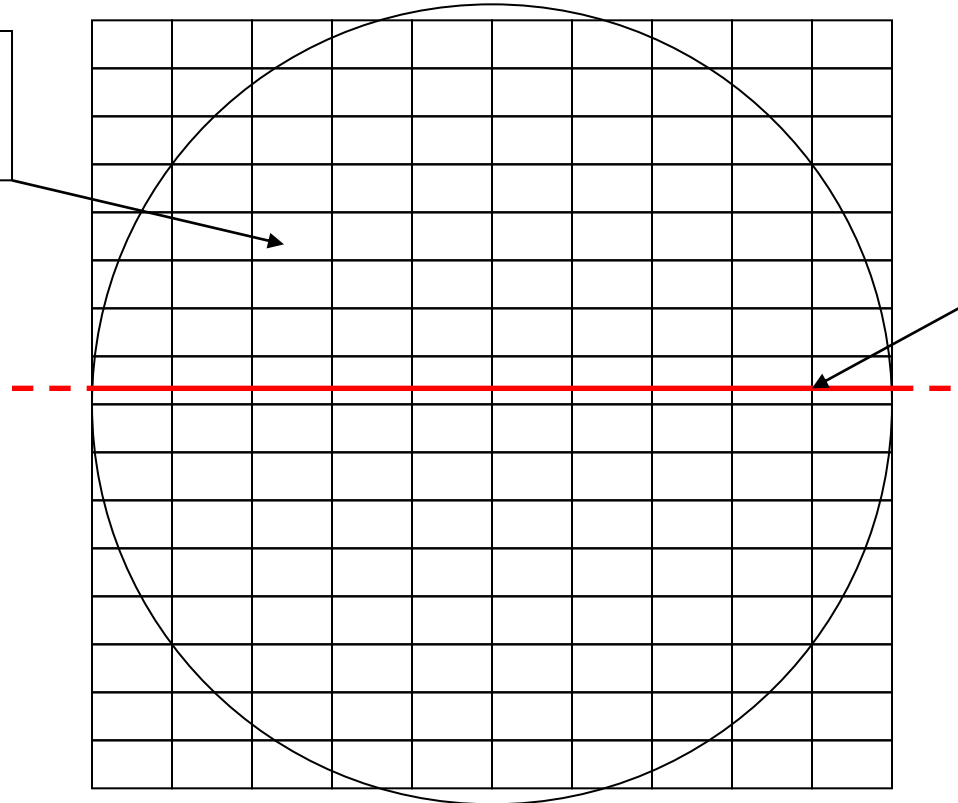


Pd wire

Circular field
Ø 12 mm

**GOOD FIELDS
Inside circle**

BOX SIZE

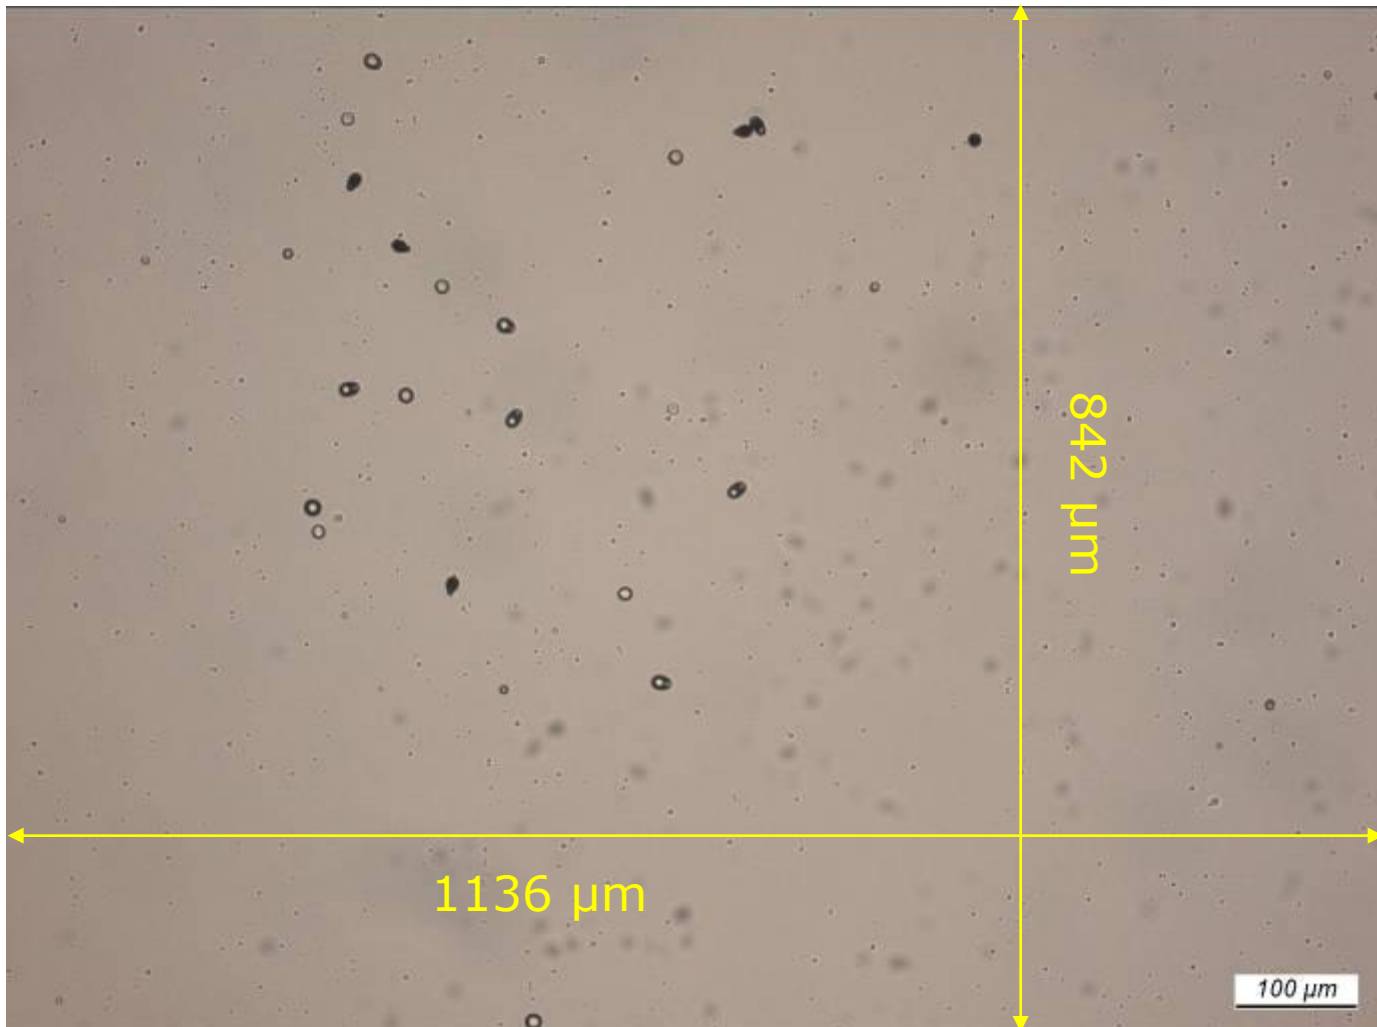

TRACKS COUNT SYSTEM



CR39

BETHE-BLOCK FORMULA

- SRIM[®] and NIST[®] software were used to calculate stopping power dE/dx and projected range of alpha particles in mylar
- Projected range for alpha 2.50 MeV is 10.99 μm
- Alpha particles with $E > 2.50$ MeV cross mylar and leave tracks on CR 39 11 μm th.


POLYETHYLENE TEREPHTHALATE (MYLAR)

COMPOSITION:

Density (g/cm³) = 1.40000E+00



Mean Excitation Energy 78.700000 (eV)

Atomic number	Fraction by weight
1	0.041959
6	0.625017
8	0.333025

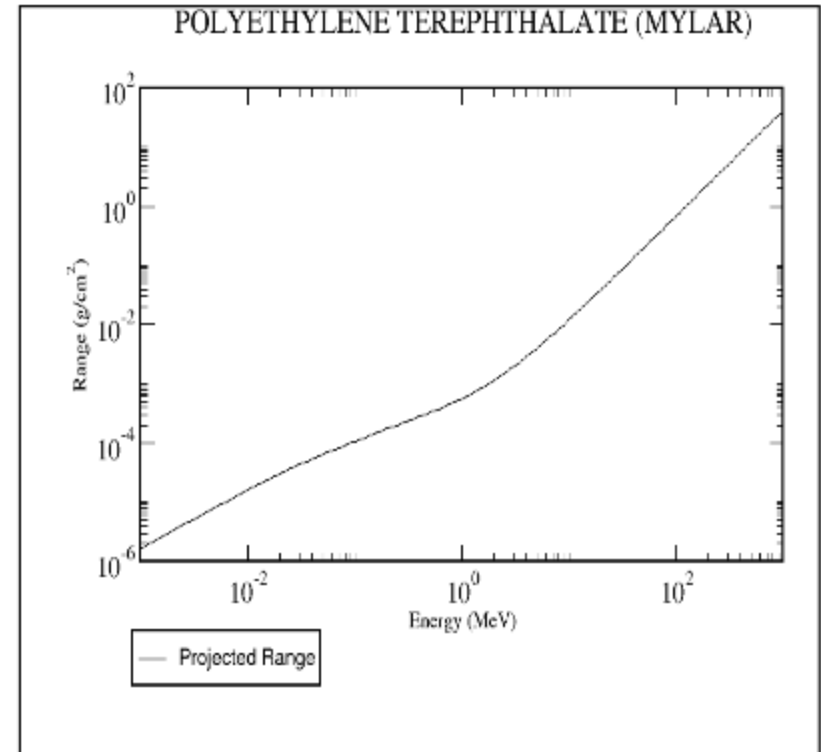

$$\text{Range} = \rho x$$

CR 39 TRACKS AFTER ETCH

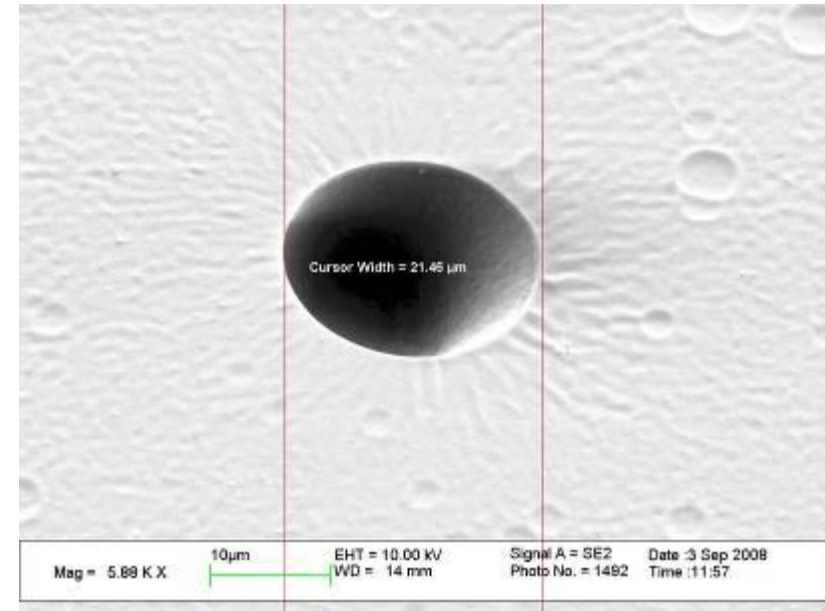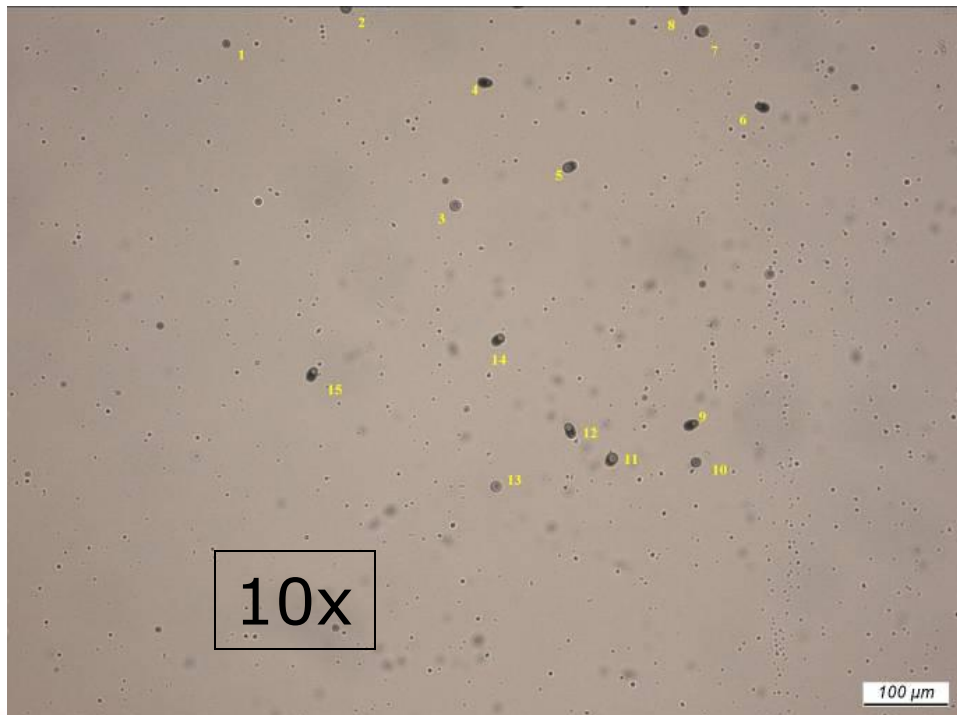


MATRIX OF TRIALS

- ▣ 2 Blank Test with $D_2O + LiCl_2$; NO ELECTROLYSIS
- ▣ 5 Electrolysis Test with $D_2O + LiCl_2$
- ▣ 2 Electrolysis Test with $D_2O + LiCl_2 + PdCl$
- ▣ 1 Electrolysis Test, NO MYLAR

CODEPOSITION

- ▣ Codeposition of Pd / D from PdCl_2 in D_2O
- ▣ PdCl_2 0.05 M + LiCl 0.5 M
- ▣ Trial 1: 10 mA
- ▣ Trial 2: 0.5 mA till total plating, ramp to 5-10-20-40-80 mA

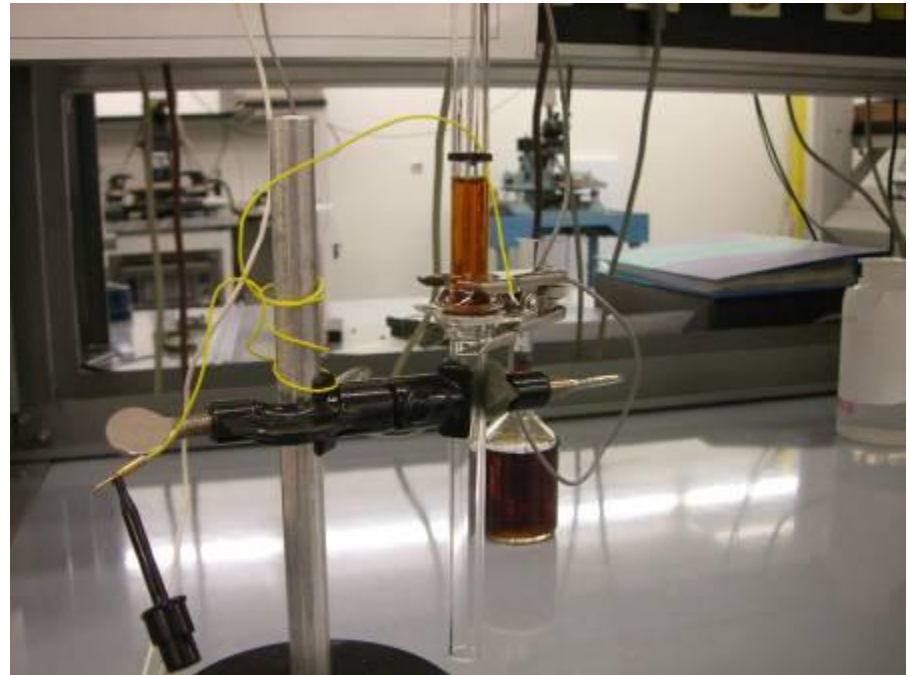

RESULTS



BLANK	
	D (cm ⁻²)
EX.1	189
EX.2	154

Tab. 3 – Track Density (Codepos.)



Exp. -A-	113 tr./cm ²
Exp. -B-	146 tr./cm ²

ELECTROLYSIS	
	D (cm ⁻²)
EX.1	222
EX.2	296
EX.3	136
EX.4	112
EX.5	74



Pd WIRE AFTER Pd/D CODEPOSITION (SEM)

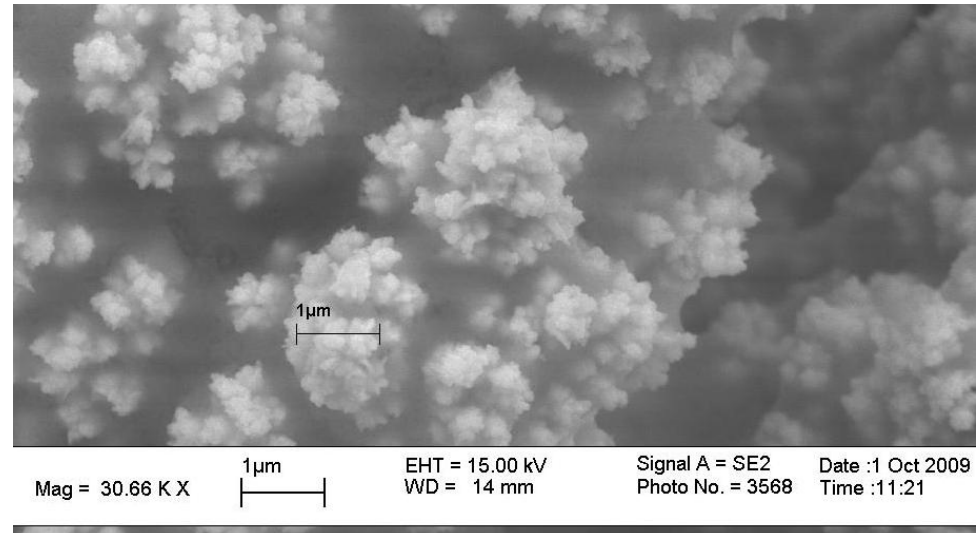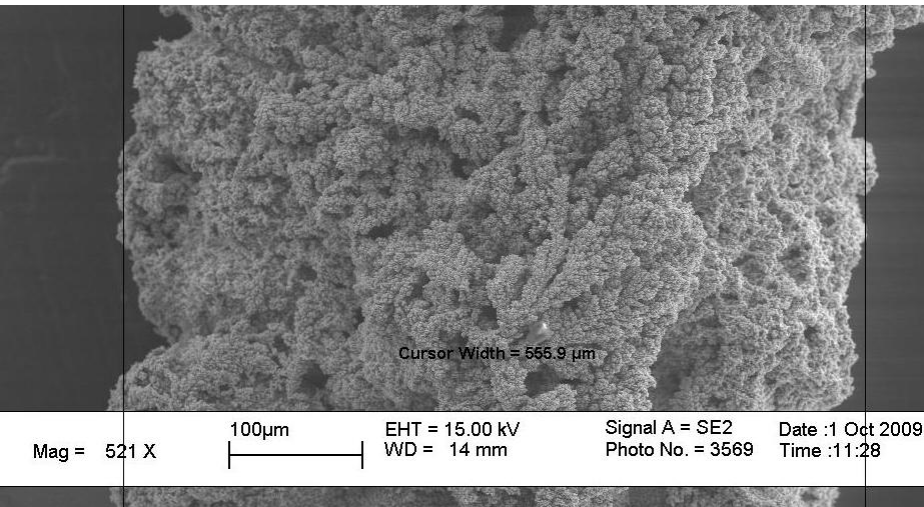


NO MYLAR - OPTICAL

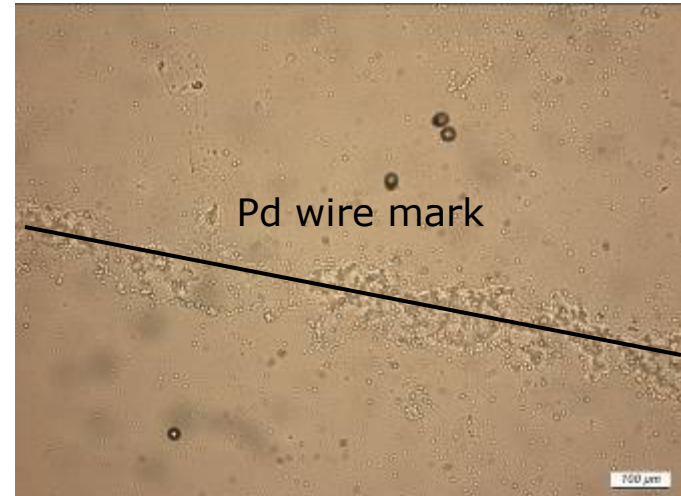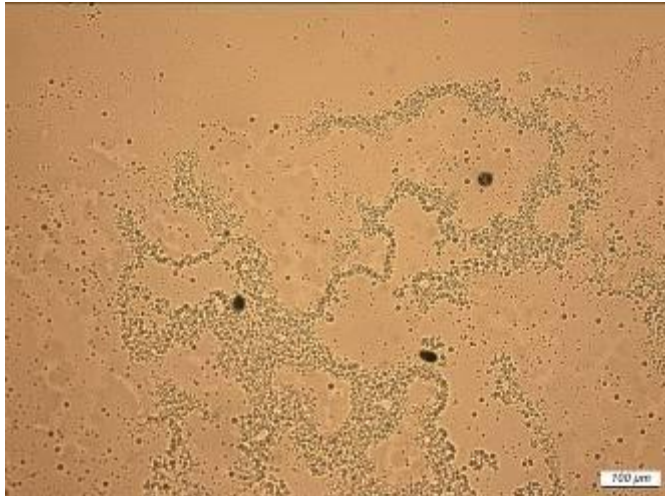

**"BOUBBLE"
PITS**

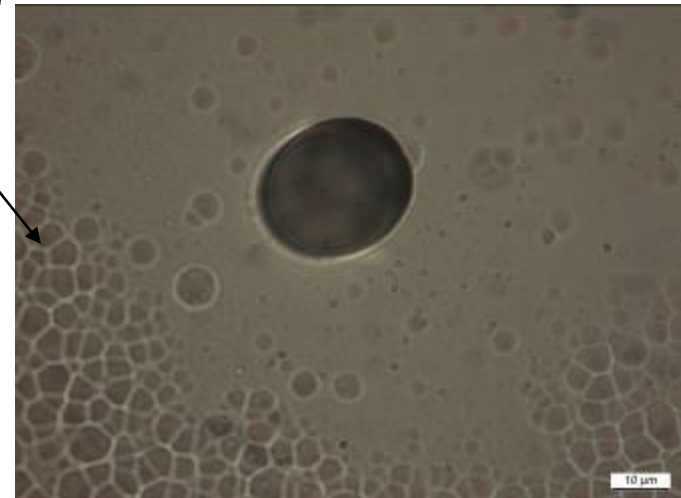
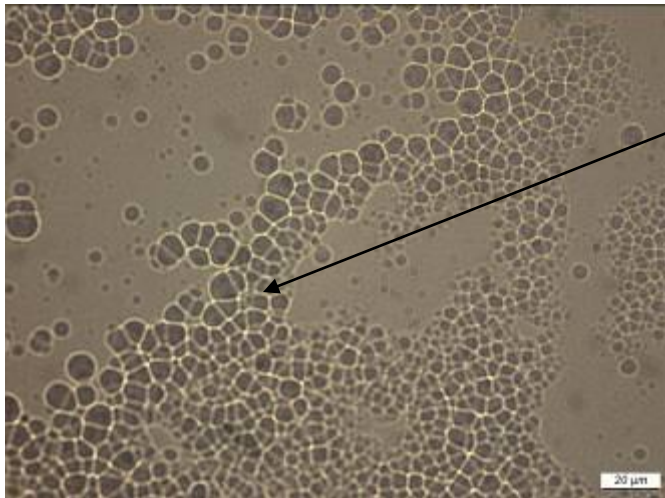


NO MYLAR - SEM

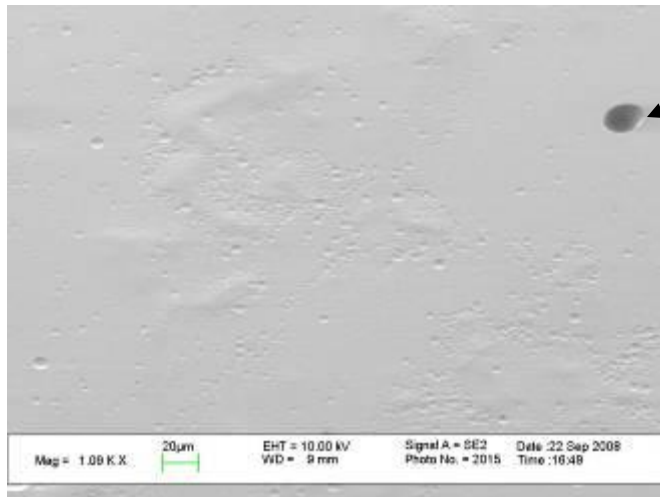

TRUE TRACK

SURFACE DAMAGE

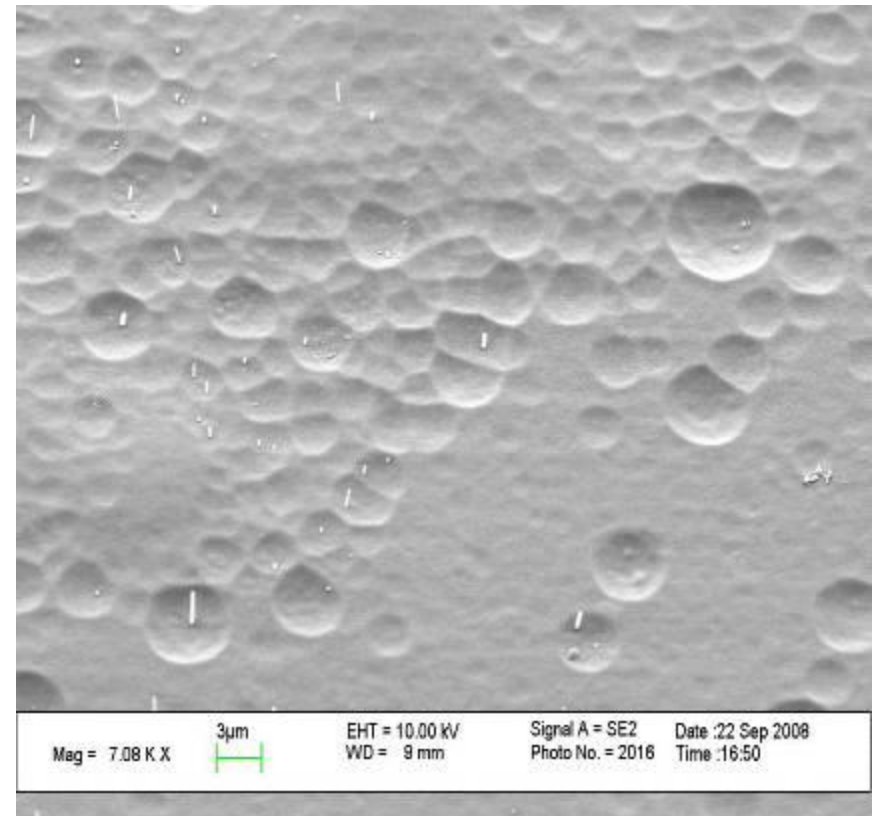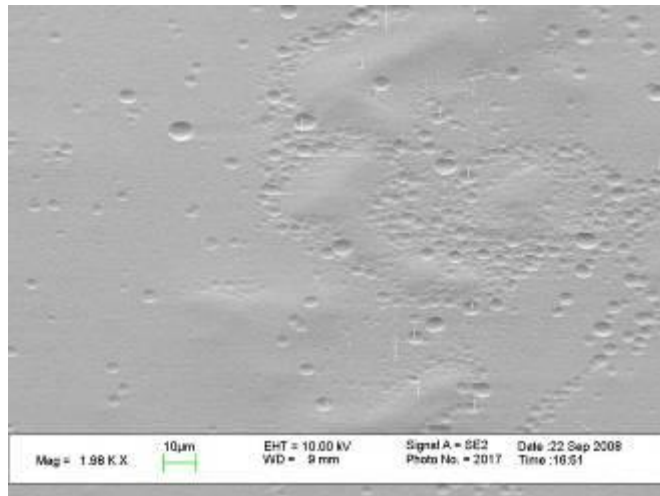


OBSERVATIONS

- ❏ Experiments with mylar between electrolyte and CR39 give a pit density of same magnitude compared with blank (no current) test; in one case less.
- ❏ Pits appearance in test without mylar is strictly different from nuclear tracks visible on the same chip
- ❏ Under the Pd cathode mark there is not an increase of pit density respect to the neighbor

CONCLUSIONS

- No meaningful evidence of specific particle emission with $E > 2.5$ MeV during D_2O electrolysis (comparable track count), with or without Pd codeposition;
- Similar results reported on site www.earthtech.com
- New experiments already started with CR39 TASTRAK detectors from “Trak analysis system ltd”

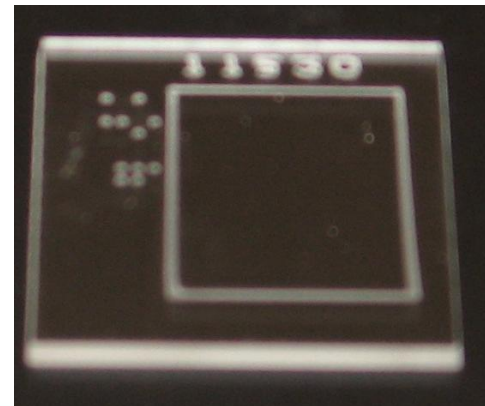

Acknowledgments

- ▣ Dr. F. Celani of Frascati INFN for Heavy Water and Palladium wire;
- ▣ M. De Pisapia (STMicroelectronics) for SEM analysis and pictures;
- ▣ Dr. G. Iori (InterCast) for CR-39 detectors;

Thank you for the attention

**U. Mastromatteo
STMicroelectronics
Via Tolomeo,1 – 20010 Cornaredo (MI)**

ICCF15 - 2009, Roma

5-9 September 2009

