

Evidence for Fast Neutron Emission During SRI's SPAWAR/Galileo-Type Electrolysis Experiments #7 and #5, Based on CR-39 Track Detector Record

A.G. Lipson¹, A.S. Roussetski^{2*}, F. Tanzella³,
E.I. Saunin¹, M. McKubre³

¹A.N. Frumkin Institute of Physical Chemistry and Electrochemistry,
Russian Academy of Sciences, Moscow 119991, Russia

²P.N. Lebedev Physics Institute, Russian Academy of Sciences,
Moscow 119991, Russia



³SRI International, Menlo Park, CA, 94025, USA



Objectives

- Verify reported nuclear emissions using Pd electrodeposition technique and CR-39 detectors (P. Boss *et al*).
 - Ag(or other metal)-wire cathodes
 - 10^7 - 10^8 pits/cm² where the cathode meets the CR-39.
 - Identify pits caused by mechanical defects - electric discharge
- Test the applicability of our track identification technique (A. Roussetski *et al*, ICCF-12, Yokohama, 2005)
 - successive etching of CR-39
 - plot track diameter evolution vs. removed depth
- Simultaneous CR-39 exposure and in-situ neutron detection.
 - Compare Live (D₂O) to Blank (H₂O)
 - Compare Background (CR-39 2m from cell) to Foreground
 - Compare to BF₃ proportional detector count rate.

Electrolytic cell and detector placement

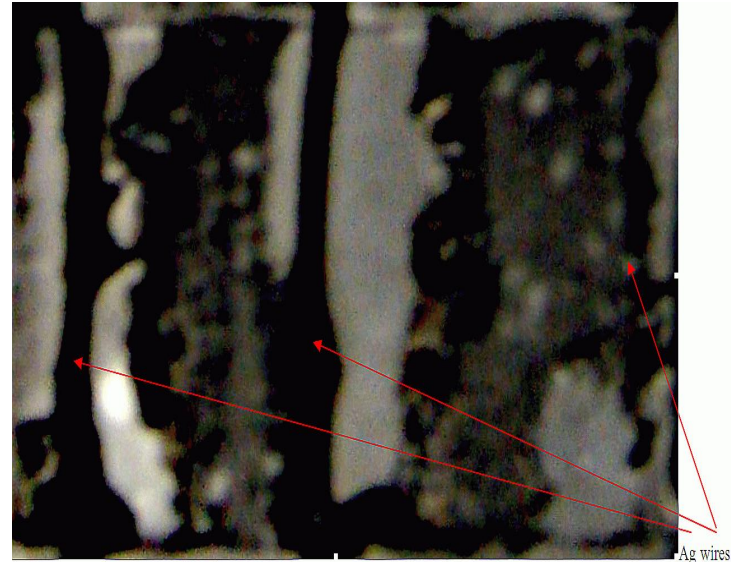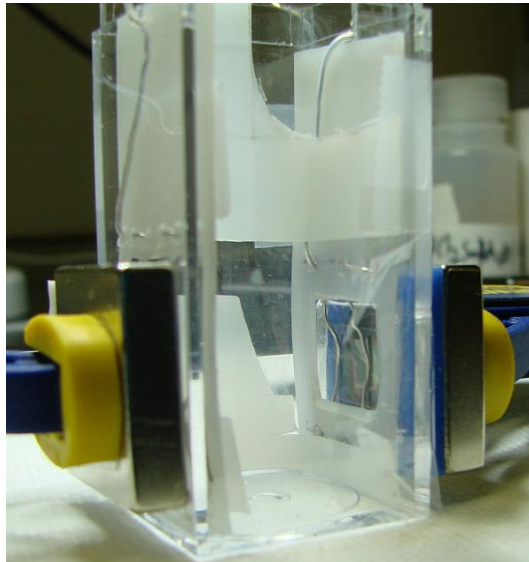

BE010-5 CR-39 and wires during electrolysis



- Cr-39 detector in runs #7 and #5 were separated from the cathode and electrolyte by sheets of 6 μm Mylar® and 60 μm polyethylene, respectively.
- BF_3 spherical neutron dosimeter with low self-efficiency $\epsilon_s = 2.5 \times 10^{-3}$ (Cf-252)
 - Statistically significant (neutron?) counts were detected at SRI during the runs



CR-39 treatment and reading

- All CR-39 detectors were cut from the same sheet.
- Etched for 6.5 hours in 65°C 6.5M NaOH after electrolysis.
- Etched three more times, for approximately 7, 14 and 21 cumulative hours in 6M NaOH at T=70 °C ($v_b \approx 1.3 \mu\text{m/hr}$).
- Used the “PAVICOM” track reading facility in Lebedev Physics Institute, Russian Academy of Sciences, Moscow to read the detectors after each etch.
- Pit distributions at the surface of etched #7 and #5 detectors were compared with that of the blank CR-39 and the proton recoil tracks from a weak Cf-252 neutron source ($I_n = 120 \text{ n/s}$)
- See Roussetski et al, Proceedings of the International Workshop on Anomalies in Hydrogen/Deuterium Loaded Metals, Catania, 2007 p. 182 (Catania Workshop)

Background 3alpha events, etch 7 hr

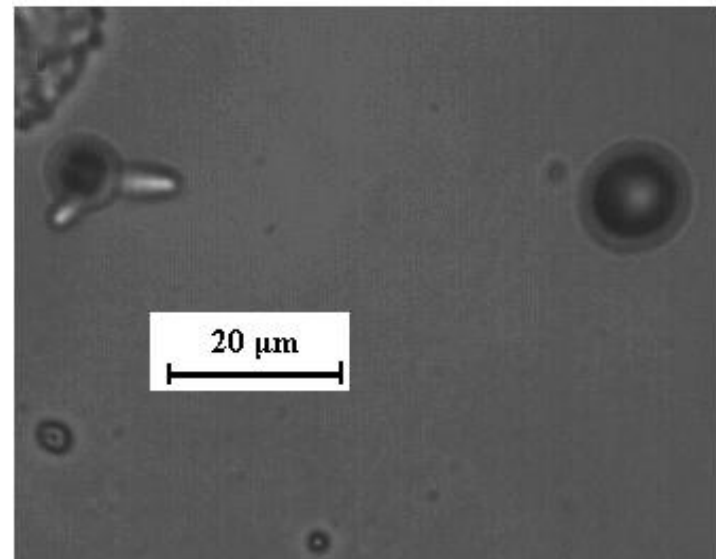
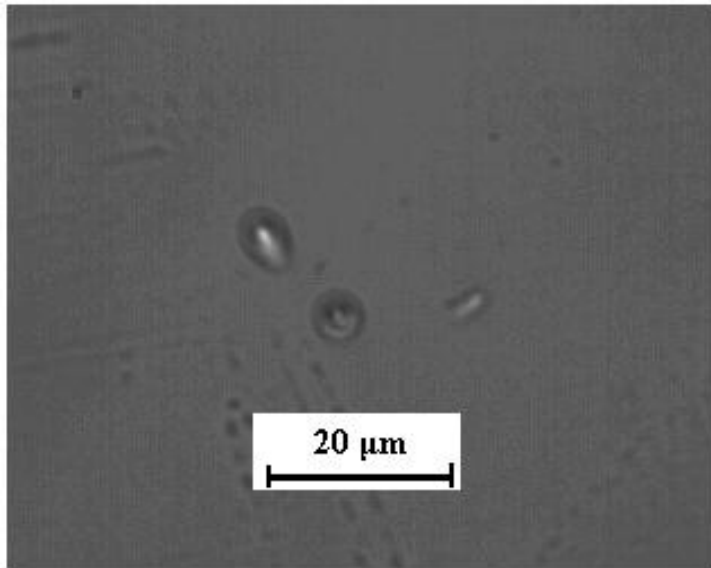





Neutron calibration results

- Proton recoil spectrum after 7 hr etch is at 4.5-9.0 μm track diameter (maximum at 5.2 μm)
 - Consistent with 2.2-2.5 MeV (see Landauer's CR-39 proton calibration curve obtained with Van DeGraaf accelerator)
- Proton recoil spectrum after 14 hr etch is at 5.0-12.0 μm track diameter (maximum at 6.0 μm)
 - Consistent with 2.2-2.5 MeV proton track diameter gain at 14 hr etching compared to 7 hr etch.
 - The neutron detection self-efficiency of CR-39 at $t = 14$ hr ($\varepsilon_n \sim 1.2 \times 10^{-4}$) is about factor of 1.3 higher than that at $t = 7$ hr ($\varepsilon_n \sim 0.9 \times 10^{-4}$) due to increase in proton recoil critical angles with the removed CR-39 depth.
- Raw data available in Catania Workshop Proceedings, p182


Comparison of Foreground #7 data (both sides) with CR-39 (H₂O electrolysis), Background after 7 and 14 hr etches. Blank and the Background show no sign of proton recoil from fast neutrons (no irradiation on shipping).

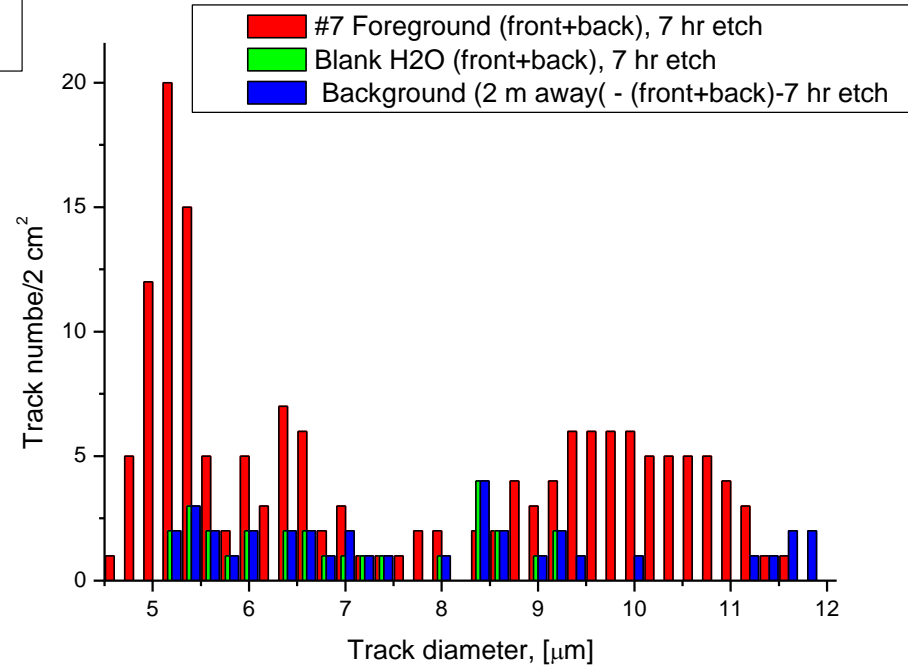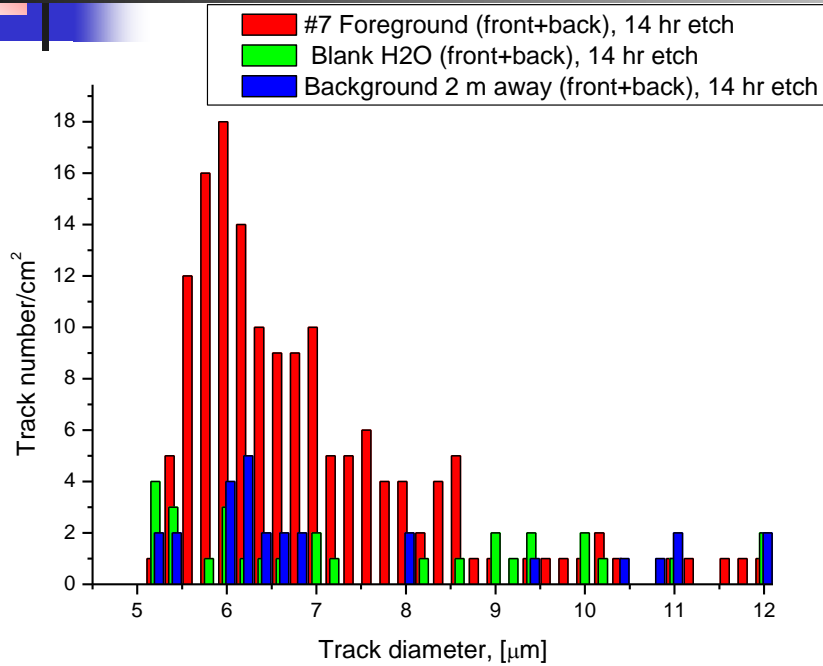

Comparison of Foreground #7 data (taken from both sides) with that from Blank experiment (H₂O electrolysis) and the Background (detector is placed 2m away of the electrolytic cell) - 21 hr etch

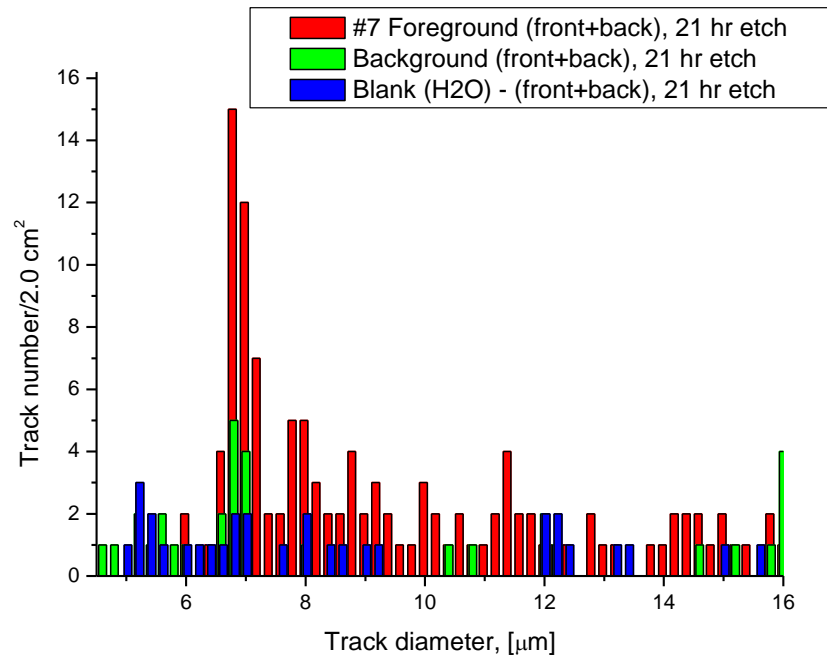

Rough reconstruction of the proton recoil spectra for CR-39 detectors obtained during run #7 and during exposure to Cf-252 neutron source using track diameter vs. proton energies and critical angle θ_c vs. proton energy plots

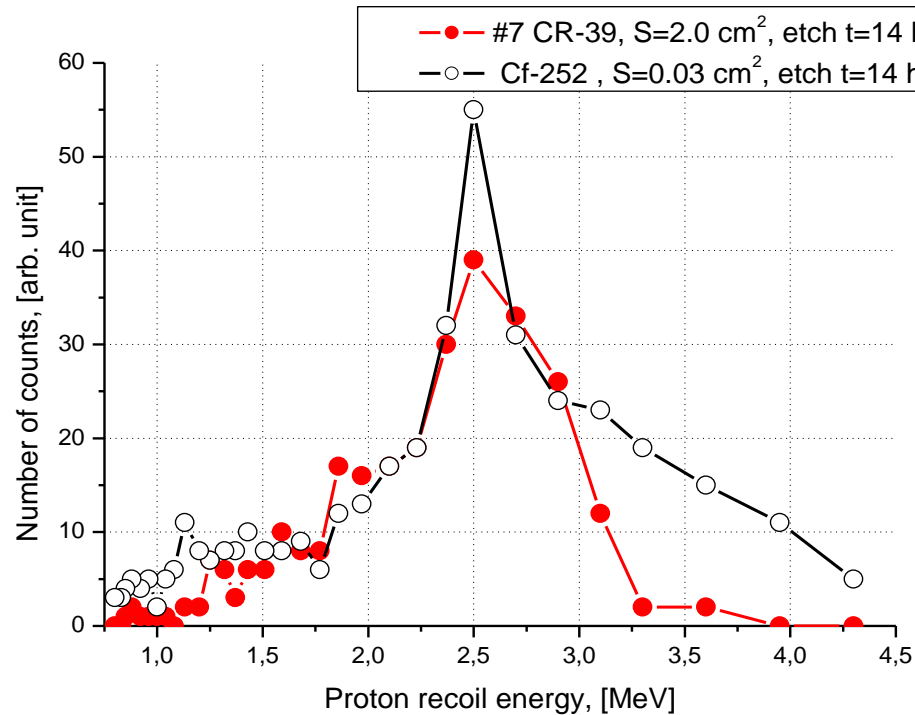

A. Roussetski et al, ICCF-15,
Rome, 10/5-9, 2009



Calculation of mean neutron emission rate:

I. For 7 hr etch time removed depth is 8.7 μ m

- Average foreground track density ($\langle N(\text{fg}) \rangle$) is 58.5 cm⁻².
- Average background track density ($\langle N(\text{bg}) \rangle$) is 6.0 cm⁻².
 - Both sides of Blank detector
- $\langle \Delta N \rangle = \langle N(\text{fg}) \rangle - \langle N(\text{bg}) \rangle = 52.5 \pm 8.0$ track/cm².
- Neutron count rate/intensity from cathode wire (I_n) is $2\langle \Delta N \rangle / (t \times \epsilon_s)$
 - $\epsilon_s = 9.2 \times 10^{-5}$ (CR-39 self-efficiency at $t_{\text{etch}}=7$ hr)
 - t is the Foreground electrolysis time.
- If the neutrons were emitted when the current > 0.5 mA ($t = 15$ days), $I_n =$
0.90 \pm 0.14 n/s
- If the neutrons were emitted when the only when the BF₃ counter read high ($\Delta t = 4$ days) $I_n =$ **3.38 \pm 0.53 n/s** |
- Hence, the neutron emission rate in the run #7 can be estimated in the range of 1.0-3.0 n/s.



Calculation of mean neutron emission rate:

II. For 14 hr etch time removed depth is 18 μm)




- Average track density at both sides of #7 CR-39 is $\langle N(\text{fg}) \rangle = 88 \text{ cm}^{-2}$.
- The Background track density at both sides of blank detector ($S = 0.25 \text{ cm}^2$ each) is the $\langle N(\text{bg}) \rangle = 26 \text{ cm}^{-2}$.
- Accordingly to calibration measurements CR-39 at etch time $t_{\text{et}} = 14 \text{ hr}$ the self-efficiency was found to be $\varepsilon_s = 1.17 \times 10^{-4}$.
- Then, for $t = 15 \text{ days}$: $I_n = 2\langle \Delta N \rangle / (t \times \varepsilon_s) = \mathbf{0.82 \pm 0.14 \text{ n/s}}$ in 2π solid angle and for $\Delta t = 4 \text{ days}$ $I_n = \mathbf{3.08 \pm 0.53 \text{ n/s}}$. Thus, the result for 14 hr etch gives approximately the same (within a standard deviation) neutron emission intensity range as that for a 7 hr.



Summary of #5 detector results (Run #SRI BE010-5)

- The #5 CR-39 detector used in SRI BE010-5 PdD_x deposition electrolysis experiment had a 60 μm polyethylene film adhered to both faces while immersed in the electrolyte and in contact with the cathode.
- This detector showed confusing results. The front face was found to be covered with high density pits (defects) making it almost impossible to distinguish real nuclear tracks from defects.
- The rear face of #5 detector shows proton recoil tracks similar to those found on both faces of the # 7 CR-39 (with a track density 50 -70% of that of #7).


Proton recoil tracks on the front side of the #5 detector
easily differentiated from the defect (“ground beef”)
Background at $t = 14$ hr etch

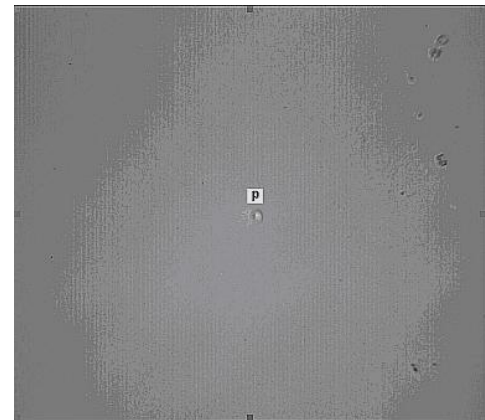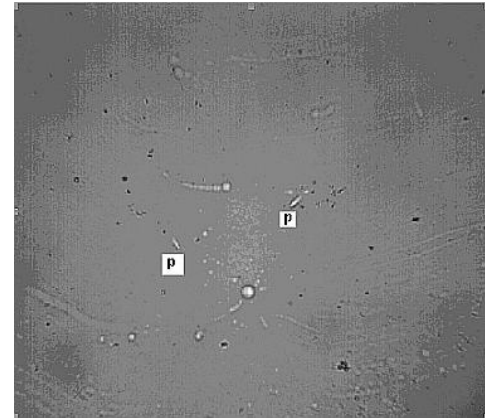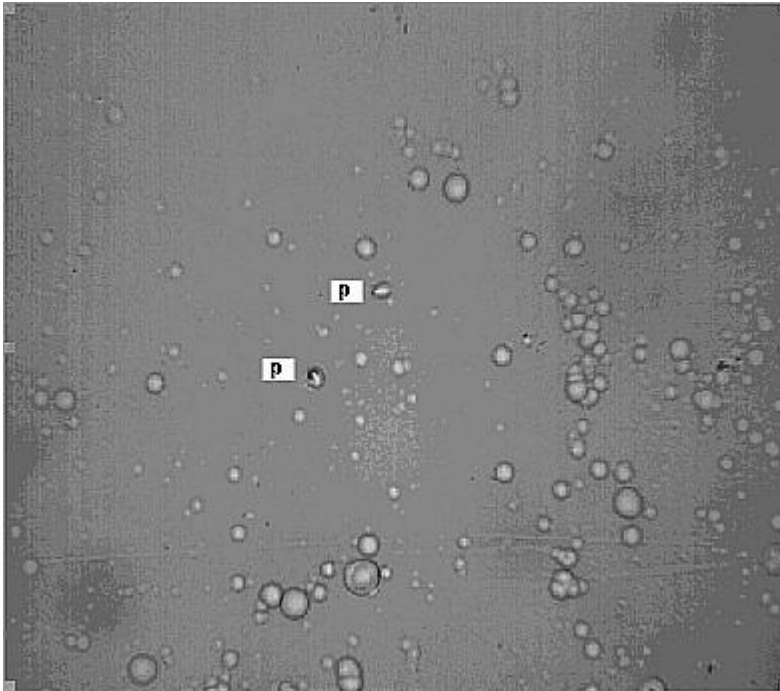

Images of the front side of #5 detector after 21 hr etch
(nuclear tracks on top of “ground beef” Background)



$2\alpha + 1p$

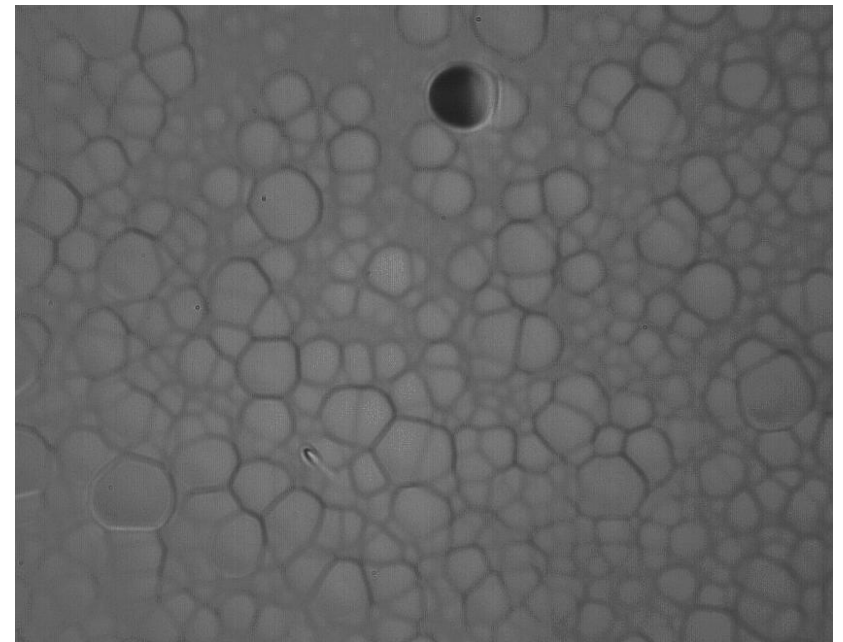

$1\alpha + 1p$

Typical images of the front side of #5 detector after extra 21 hr etch






single oblique recoil protons




normal incidence recoil protons


Proton recoil tracks from the “clean” back side of #5 detector after 7, 14, and 21 hr etches

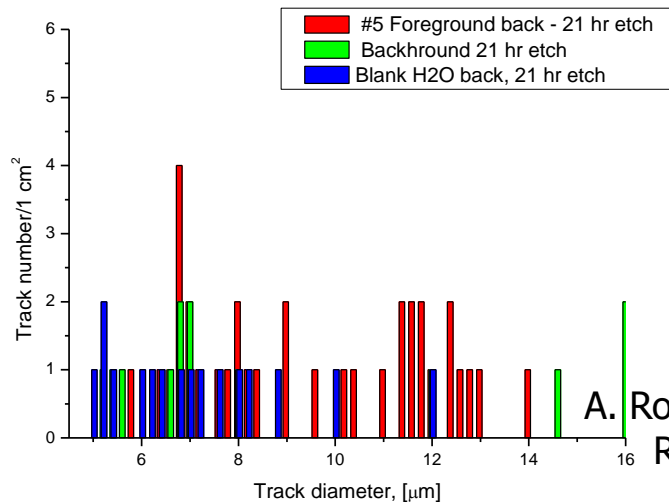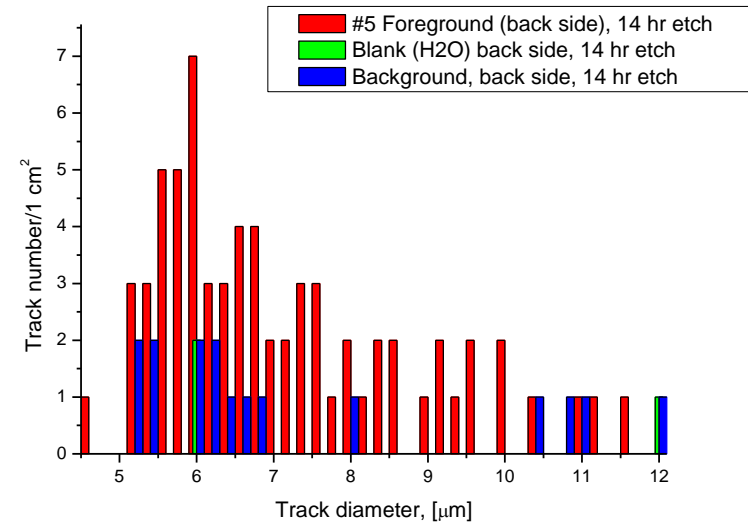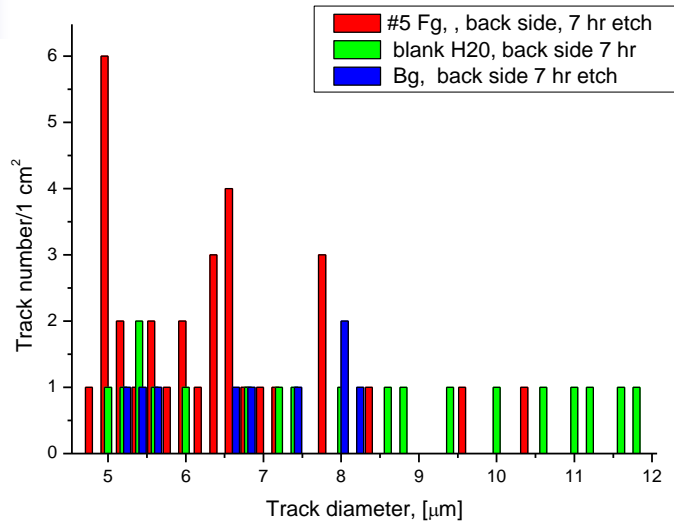

A. Roussetski et al, ICCF-15,
Rome, 10/5-9, 2009

Comparison of the back and the front side proton recoil spectra at $t = 14$ hr etch

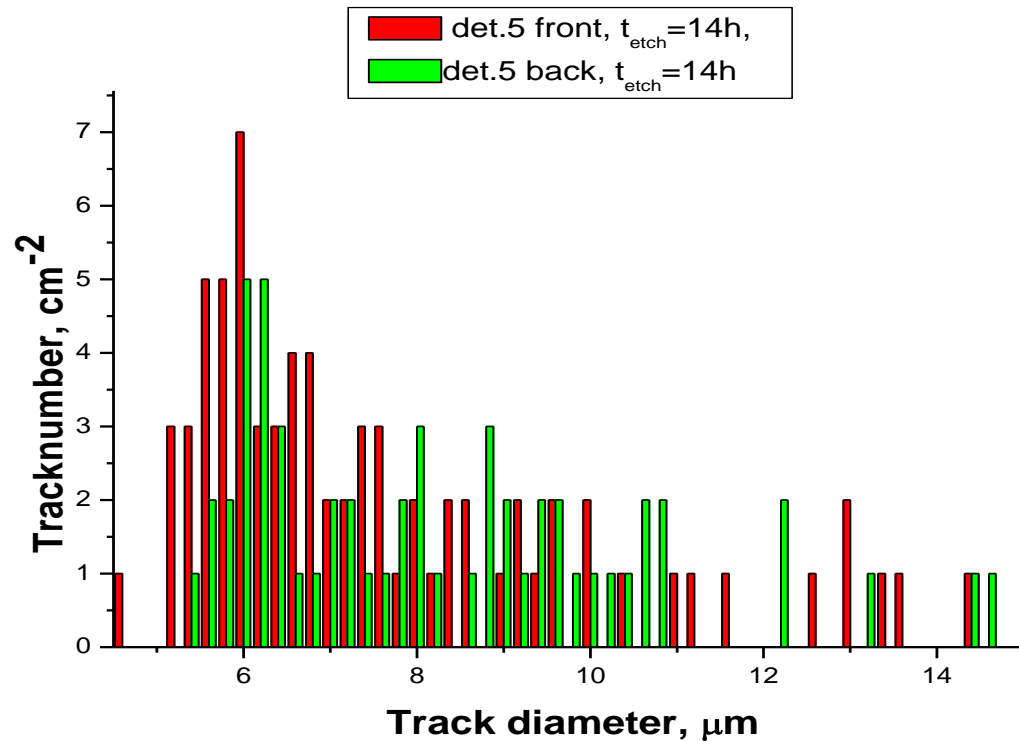



Estimate of neutron emission rate taken for $t = 20$ days of electrolysis in the run # BE010-5:



$t \sim 7$ hr etch

- only back side: $N(\text{fg}) = 30.0 \pm 5.48$ recoil protons/cm²
- $N(\text{Bg}) = 6 \pm 4$ cm⁻²
- $\Delta N = 24.0 \pm 6.8$ p/cm²
- $\langle I_n \rangle = 2\langle \Delta N \rangle / (t \times \epsilon_s) = 48 / (1.73 \times 10^6 \times 9.2 \times 10^{-5}) = 0.30 \pm 0.08$ n/s in 2π solid angle


$t = 14$ hr etch

- back: $N(\text{Fg}) = 45$ cm⁻², front $N(\text{Fg}) = 63$ cm⁻² $\langle N(\text{fg}) \rangle = 54.0 \pm 7.3$ cm⁻²
- Background $\langle N(\text{bg}) \rangle = 26 \pm 5.1$ cm⁻²
- $\Delta N = 28.0 \pm 8.9$ cm⁻²
- $\langle I_n \rangle = 2\langle \Delta N \rangle / (t \times \epsilon_s) = 56 / (1.73 \times 10^6 \times 1.2 \times 10^{-4}) = 0.29 \pm 0.09$ n/s in 2π solid angle
- If $t = 1$ day $I_n = 6.0 \pm 1.6$ n/s in 2π solid angle

Neutron protocols for runs #5 and #7 in SRI

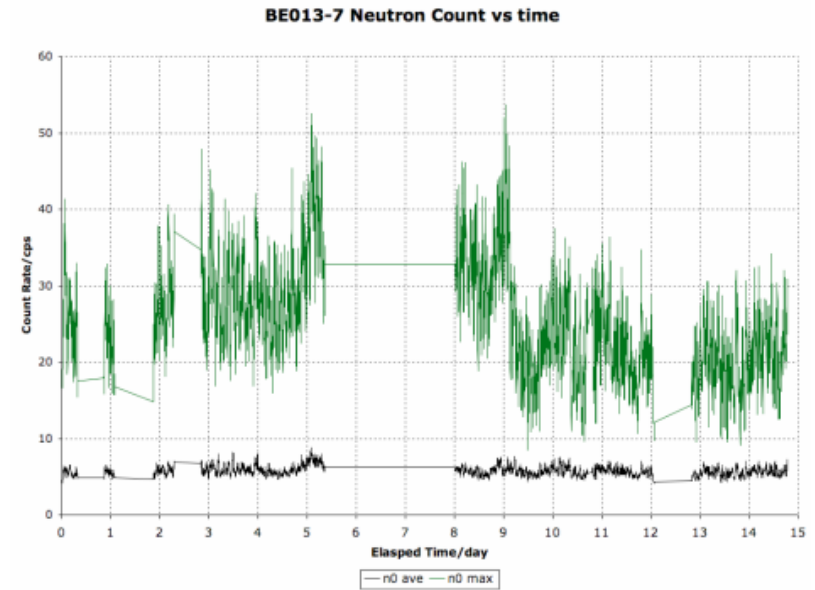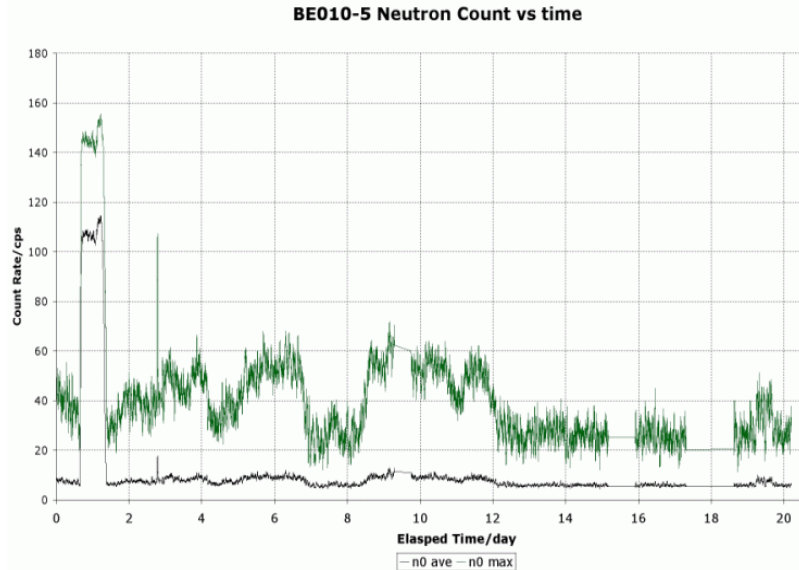

A. Roussetski et al, ICCF-15,
Rome, 10/5-9, 2009



Sensitivity to neutrons of SRI's BF_3 sphere and CR-39 neutron results

- Total fast neutron efficiency of the BF_3 detector (ε_t) is 7.6×10^{-5}
 - Fast neutron self efficiency $\varepsilon_s = 7.6 \times 10^{-3}$ ($R \sim 0$ cm)
 - Distance between the detector and cathode wire is 10 cm
- Fast neutron sensitivity of the BF_3 detector $S = 3[\langle N_b \rangle / (\varepsilon_t^2 \tau)]^{1/2}$
 - Minimal neutron emission rate that can be distinguished from background
 - At least, 3 standard deviations from background
 - $\langle N_b \rangle$ = the average background count rate
 - τ = the duration of neutron detection.
- For Foreground #7: $\langle N_b \rangle \approx 6.0$ cps, $\tau = 15$ days, $\Rightarrow S \approx 150$ n/s
 - 300 n/s, assuming neutron emission during only 4 days
 - 100x higher than neutron emission forming CR-39 recoil protons
- For Foreground #5: $\tau = 20$ days $\Rightarrow S \approx 130$ n/s
 - 400x higher than seen from CR-39
 - If $\tau = 1$ day (length of peak seen in BF_3 detector) $S \sim 600$ n/s
 - ~ 100 times higher than seen in CR-39



Conclusions I

- Analysis of CR-39 detectors from two electrolysis experiments show that a weak, but statistically significant emission of fast neutrons has been observed .
- #7 detector, protected by 6 μm mylar film, shows “clean” front and back faces, containing only nuclear tracks (proton recoil).
- #5 detector, protected by 60 μm PE film, shows mixed zones of defects (“ground beef”) and nuclear tracks on its front side and lower (than #7) proton recoil density at the back side.
 - The small diameter defect pits can be eliminated by in-depth etching (removed depth $h > 18 \mu\text{m}$) allowing us to distinguish actual nuclear tracks of proton recoil, caused by neutrons as well as by energetic charged particles (protons and alphas) emitted from the PdD_x film deposited on the detector during electrolysis.
- Comparison of proton recoil spectra (track number vs. track diameter) of the Foreground, Blank, Background, and Cf-252 run detectors gives solid evidence for a fast neutron emission taking place during the runs #7 and #5.



Conclusions II

- Comparison of the neutron emission rates obtained from CR-39 analysis with SRI's proportional BF_3 detector measurements shows a large discrepancy.
 - The BF_3 detector results show orders of magnitude higher neutron emission than that calculated from the noiseless CR-39 data .
- Due to the low neutron sensitivity of the BF_3 detector (and absence of pulse-height/pulse shape analysis), we assume that the signal of BF_3 sphere contains significant electromagnetic noise.
- In order to provide additional confirmation of our CR-39 based neutron emission results, higher efficiency measurements with a more sophisticated electronic neutron detector would be desirable.



Acknowledgements

This work was supported by the New Energy Institute. The electrochemical measurements were supported by SRI International.

We also personally thank, S. Krivit, E. Greenspan, and L. Forsley for arranging this work as well as for valuable discussions.